



MURRAY

BORN IN
ALBURY
AUSTRALIA

AUSTRALIAN WIRE FENCING



100% Australian
Owned & Operated





MURRAY



Our **6,000 square metre** Murray Manufacturing Facility in Albury NSW combines **over 70 years** of manufacturing experience and the state-of-the-art equipment with Whites' 50-year market experience.

Murray Manufacturing Facility
Albury NSW

BORN IN
ALBURY
AUSTRALIA



BORN IN
ALBURY
AUSTRALIA

MURRAY

MURRAY™
STIFF STAY®



Murray Stiff Stay prefabricated fencing is **exclusively made** on the world-renowned Stiff Stay machines producing a tight, smooth knot in multiple configurations to suit farming requirements across the country.


Murray Barbed Wire is produced using the **latest and highest tolerance** barbed wire machines available today, the barbs are tightly twisted to prevent them slipping. All barbed wire is supplied on hardwood timber spools.

MURRAY™
BARBED WIRE



MURRAY™
GATES

Murray Gates are the **real heavyweights** in Australian-made gates. Produced with a tighter mesh aperture, 5mm pre-galv wire and featuring the latest notched welding techniques for extra strength and great looks.

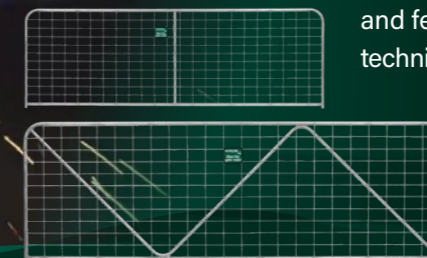

Scan for more information

Murray Hinged Joint, Murray Fence Wire and other Murray products are also manufactured at our Albury site.


STIFF STAY[®]

Murray Stiff Stay prefabricated fencing is made exclusively on the Stiff Stay machine at our Albury Manufacturing facility in regional Australia.

STIFF STAY[®] FARM FENCING

- Popular 30cm and 15cm picket spacings
- Heavily Galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength (Heavy Galv only)
- 2.50mm high tensile line wires and 2.50mm vertical stay wires

Also available in Standard Galvanised to AS4534 with 2.50mm high tensile line wires and 2.50mm vertical stay wires

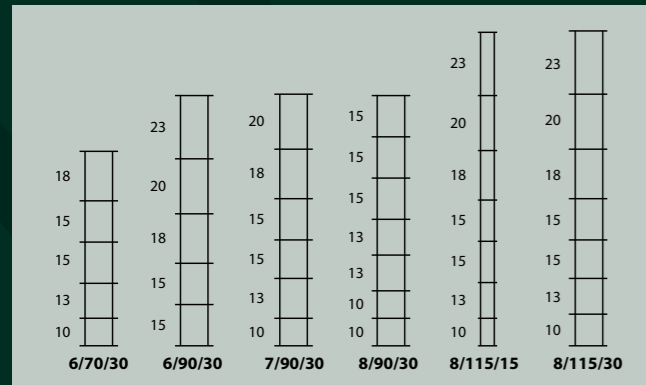

Made in Australia
100% Australian Owned & Operated



Smoother, tight **cross-over knot** that locks the wires in place for strength and safety



Continuous vertical pickets that are locked into place to resist buckling and sagging



Better over uneven terrain, resist sagging



Pre-stripped rolls for faster fencing - no need to strip picket wires; the first two pickets and the last two pickets are removed



Tension crimps provide a quick visual for judging tension



Heavily Galvanised last four times longer




Heavily Galv. Code (Weight)	Standard Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY[®] FARM FENCING					
10231 (72kg)	A0201 (68kg)	6/70/30	200m	High	9
A0261 (180kg)		6/70/30	500m	High	4
10232 (78kg)		6/90/30	200m	High	9
A0262 (195kg)		6/90/30	500m	High	4
10233 (86kg)	10203 (81kg)	7/90/30	200m	High	9
10263 (215kg)	10223 (202kg)	7/90/30	500m	High	4
10238 (63kg)		8/90/15	100m	High	9
A0266 (156kg)		8/90/15	250m	High	4
10234 (94kg)	A0204 (89kg)	8/90/30	200m	High	9
A0265 (235kg)		8/90/30	500m	High	4
10239 (69kg)		8/115/15	100m	High	9
A0269 (172kg)		8/115/15	250m	High	4
10261 (101kg)		8/115/30	200m	High	9

Heavily Galv. Code (Weight)	Product	Hinged Apron	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY[®] HORSE FENCING					
10264 (68kg)	10/90/5		50m	High	9
10256 (93kg)	13/122/5		50m	High	9
STIFF STAY[®] EXCLUSION FENCING					
10235 (62kg)	8/80/15		100m	High	9
10238 (63kg)	8/90/15		100m	High	9
A0266 (156kg)	8/90/15		250m	High	4
A0268 (209kg)	8/90/15	30cm 3-line	250m	High	4
10289 (76kg)	11/90/15		100m	High	9
10285 (97kg)	11/90/15	30cm 4-line	100m	High	9
10251 (86kg)	13/90/15		100m	High	9
10255 (106kg)	13/90/15	30cm 3-line	100m	High	9
10239 (69kg)	8/115/15		100m	High	9
A0269 (172kg)	8/115/15		250m	High	4
A0271 (225kg)	8/115/15	30cm 3-line	250m	High	4
10259 (92kg)	13/115/15		100m	High	9
A0273 (140kg)	13/115/15	30cm 3-line	100m	High	9
A0272 (228kg)	13/115/15		250m	High	4
10260 (118kg)	15/150/15		100m	High	9
A0276 (130kg)	15/150/15	30cm 3-line	100m	High	9
A0275 (273kg)	15/150/15		250m	High	4
A0277 (325kg)	15/150/15	30cm 3-line	250m	High	4
A0278 (651kg)	15/150/15	30cm 3-line	500m	High	1

STIFF STAY[®] HORSE FENCING


- Super-tight 5cm picket spacings
- Heavily Galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength
- 2.50mm high tensile line wires and 2.50mm vertical stay wires



STIFF STAY[®] EXCLUSION FENCING

- Narrow 15cm picket spacings
- Heavily Galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength
- 2.50mm high tensile line wires and 2.50mm vertical stay wires

Optional pre-attached hinge apron to restrict penetration or digging under the fence

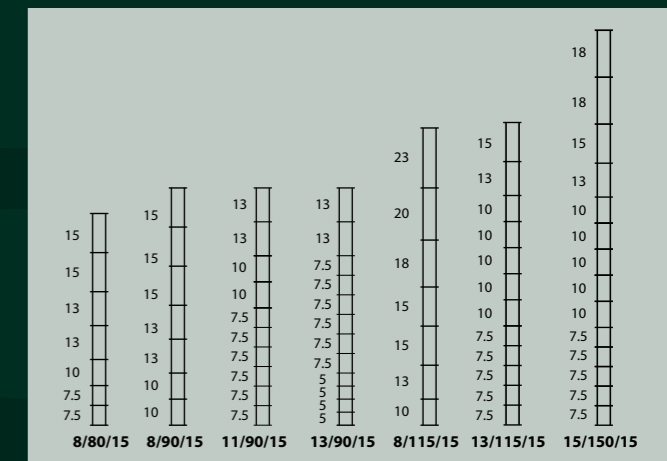

Made in Australia
100% Australian Owned & Operated



HINGED JOINT

Murray Hinged Joint prefabricated fencing is made at our Albury Manufacturing facility in regional Australia.

HINGED JOINT FARM FENCING

- 30cm picket spacings ideal for stock, boundary and internal fencing
- 15cm picket spacing for more intensive farming
- Galvanised to AS4534
- 2.50mm high tensile line wires and 2.50mm vertical stay wires


Also available in Heavily Galvanised to AS4534

HINGED JOINT FARMPLUS™

- Narrow 15cm picket spacings for intensive farming
- Galvanised to AS4534
- 2.50mm high tensile top and bottom wires with 2.00mm high tensile line wires and 2.50mm vertical stay wires



Flexible knot absorbs impact and retains shape

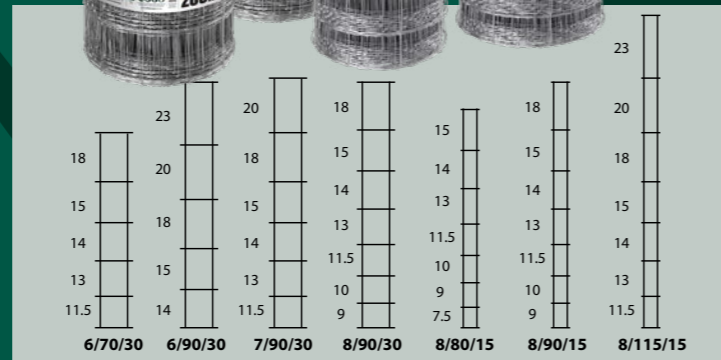

Code	Product	Tensile Strength	Roll Length	Roll Weight	Pallet Qty	Galv. Coating	Line Wire
STANDARD GALVANISED HINGED JOINT							
10291	6/70/30	High	200m	70kg	9	Standard	2.5mm
10292	6/90/30	High	200m	74kg	9	Standard	2.5mm
10293	7/90/30	High	200m	83kg	9	Standard	2.5mm
10294	8/90/30	High	200m	92kg	9	Standard	2.5mm
10295	8/80/15	High	100m	60kg	9	Standard	2.5mm
10298	8/90/15	High	100m	61kg	9	Standard	2.5mm
10299	8/115/15	High	100m	69kg	9	Standard	2.5mm

Code	Product	Tensile Strength	Roll Length	Roll Weight	Pallet Qty	Galv. Coating	Line Wire
FARMPLUS™ HINGED JOINT							
10283	8/115/15	Medium	100m	48kg	9	Standard	2.0mm



Scan for more information

Made in Australia

100% Australian Owned & Operated



BARBED WIRE

Murray Barbed Wire is made at our Albury Manufacturing facility in regional Australia.

HIGH TENSILE BARBED WIRE


- Made from high tensile wire in a continuous length for added strength - no joins
- Reverse twist pattern absorbs heavy loads by 'unwinding' and 'rewinding' under stock pressure
- Barb spacing is consistent and close with limited movement
- Available in Heavily Galvanised 1.57mm, 1.80mm and 2.00mm HT wire
- Meets AS2423 Australian Standard

IOWA BARBED WIRE


- Made from 2.50mm soft/low tensile wire in a continuous length - no joins
- Continuous twist pattern locks the barbs in place limiting movement with stock pressure
- Barb spacing is consistent and close with limited movement
- More fire resistant than high tensile - ideal for fire prone areas
- Softer wire is easier to work with than high tensile




Reverse Twist Style for optimum strength and tensioning



Continuous Twist Style



Continuous Length - No Joins



Coiled on hardwood spools



Code	Wire	Tensile Strength	Coil Length	Coil Weight	Pallet Qty	Galv. Coating	Rec. Tension Breaking Strain
HIGH TENSILE BARBED WIRE							
10100	2.00mm	High	500m	37kg	36	Heavy	1.6kn, 5.0kn
10101	1.80mm	High	500m	28kg	32	Heavy	1.3kn, 4.0kn
10102	1.57mm	High	500m	24kg	48	Heavy	1.3kn, 3.0kn
IOWA BARBED WIRE							
10150	2.50mm	Soft	400m	45kg	27	Standard	1.3kn, 3.0kn
10151	2.50mm	Soft	400m	45kg	27	Heavy	1.3kn, 3.0kn



Scan for more information

Made in Australia

100% Australian Owned & Operated

FENCE WIRE



Coiled for smooth, tangle-free pay-off

Murray Fence Wire is coiled at our Albury Manufacturing facility in regional Australia and available in four grades:

High Tensile Wire

- Suited to longer strains/fence runs and wider post spacings where strength is imperative
- Heavily galvanised lasts four times longer than standard galvanised wire

Medium Tensile Wire

- Easier to handle than HT, ideal with prefab fencing
- Heavily galvanised last four times longer than standard galvanised

Soft Tensile Wire

- Easiest to handle, cost effective
- More fire resistant than HT/MT wire - ideal for fire prone areas

Tie Wire

- Easiest to handle and tie, cost effective

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Sling Qty	Galv. Coating	Rec. Tension Breaking Strain
HEAVILY GALVANISED FENCE WIRE							
10014	2.50mm	Medium	1500m	58kg	10	Heavy	1.3kn, 3.7kn
10015	2.50mm	High	1500m	58kg	10	Heavy	1.8kn, 5.4kn
10016	2.80mm	High	1000m	48kg	10	Heavy	2.0kn, 6.8kn
10017	3.15mm	Soft	750m	46kg	10	Heavy	1.2kn, 3.0kn
10018	4.00mm	Soft	500m	50kg	10	Heavy	1.8kn, 4.8kn
STANDARD GALVANISED FENCE WIRE							
10161	4.00mm	Soft	500m	49kg	10	Standard	1.8kn, 4.8kn
10163	3.15mm	Soft	750m	46kg	10	Standard	1.2kn, 3.0kn
10170	2.50mm	Medium	1500m	58kg	10	Standard	1.3kn, 3.7kn
10171	2.50mm	High	1500m	58kg	10	Standard	1.8kn, 5.4kn
STANDARD GALVANISED TIE WIRE							
10164	2.50mm	Soft	1300m	50kg	10	Standard	1.3kn, 3.7kn
10165	2.00mm	Soft	2000m	50kg	10	Standard	-
10166	1.57mm	Soft	3200m	50kg	10	Standard	-



Meets Australian Standards
Coiled in Australia



Scan for more information





MURRAY



BORN IN
ALBURY
AUSTRALIA



A family
owned
Australian
business

Whites Group Pty Ltd

ABN 25 001 845 478

SYDNEY
5 Dolerite Way,
Pemulwuy,
NSW 2145

ALBURY
109 Boronia Rd,
Albury,
NSW 2640

BRISBANE
U4, 15 Seeana Place,
Heathwood,
QLD 4110

MELBOURNE
64 Colemans Rd,
Dandenong South,
VIC 3175

TOWNSVILLE
13 Crocodile Cres,
Mount St John,
QLD 4818

PERTH
53 Collopy Rd,
Perth Airport,
WA 6105

ADELAIDE
18 Bradford Way,
Cavan,
SA 5094

Enquiries: **1300 559 732** Fax: 1300 559 762 Email: info@whitesrural.com.au
Specifications referred to in this publication are subject to change,
variation and/or improvement without notice.

For the most up-to-date details on all our rural products, visit our website
at www.whitesrural.com.au

© WHITES RURAL and STIFF STAY are registered trademarks of Whites Group Pty Ltd
™ MURRAY is a trademark of Whites Group Pty Ltd

facebook.com/whitesrural