




MURRAY



AUSTRALIAN WIRE FENCING

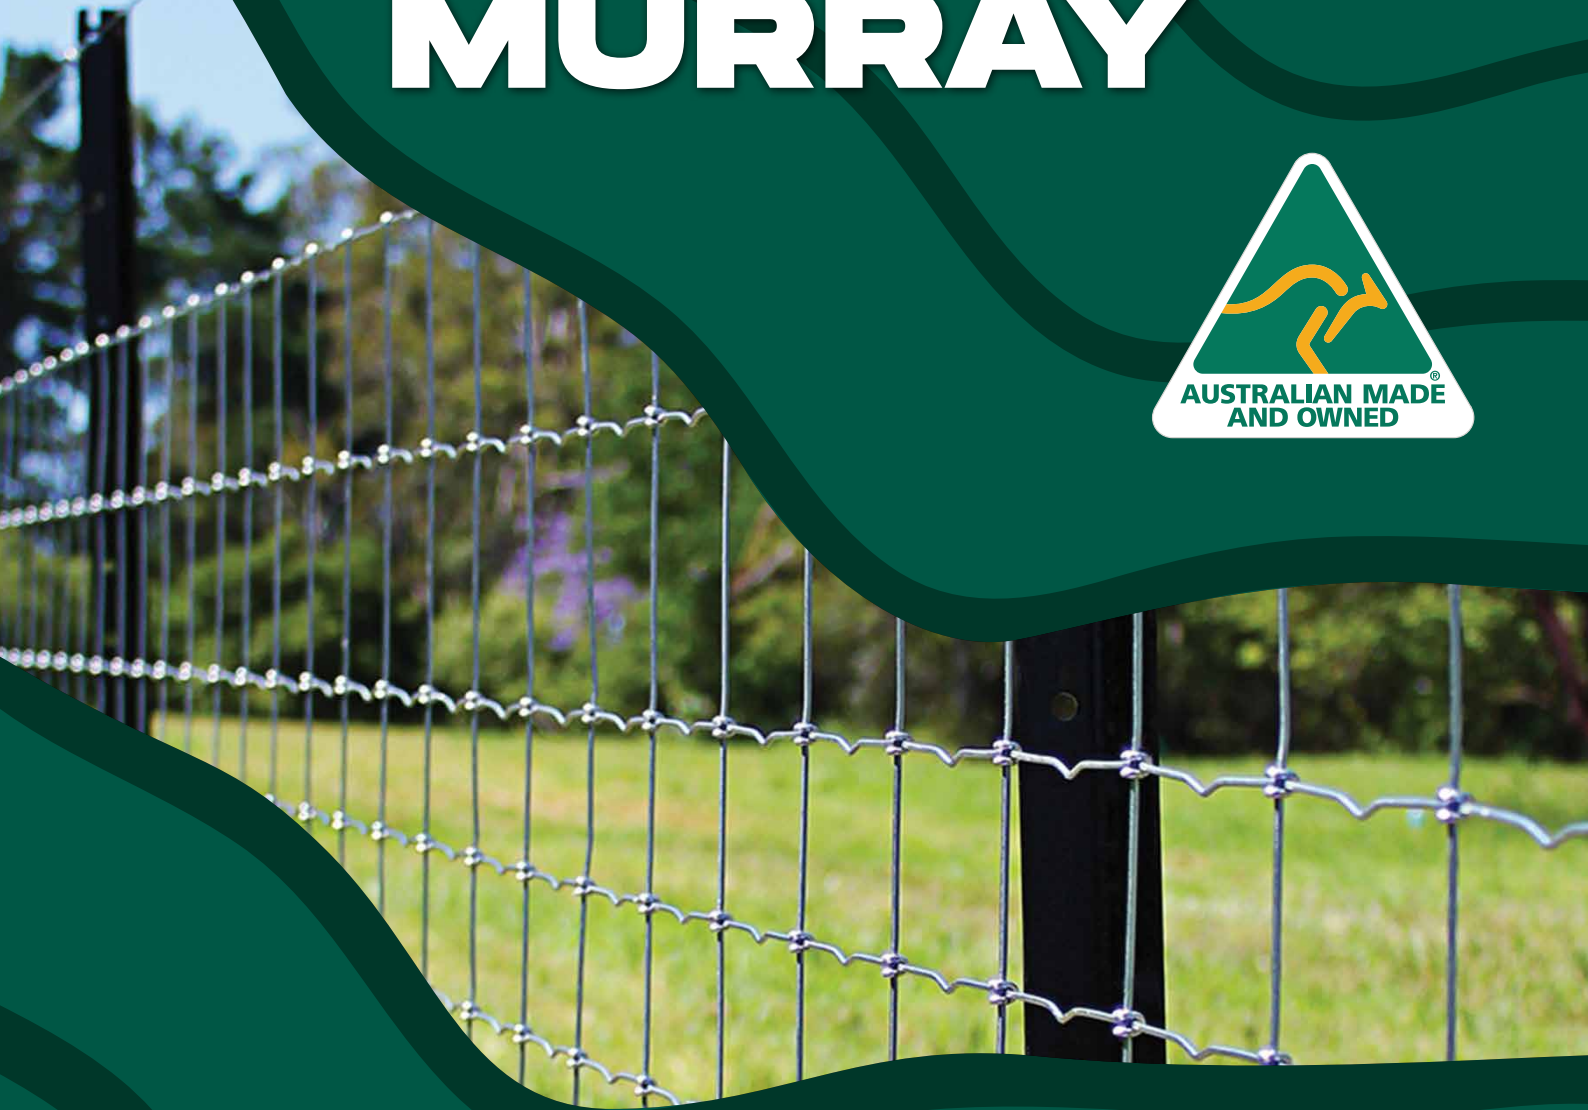



Proudly Australian Made: Murray Rural Fencing

Murray fencing products are officially Australian Made certified, giving you confidence in their local origin, quality and reliability.

Manufactured in Albury, NSW, Murray fencing builds on more than 50 years of Australian manufacturing experience, supporting rural communities through generations of change.

Why Australian Made matters

The Australian Made certification provides independent verification that Murray products are:

- Manufactured in Australia
- Built to meet local conditions
- Made to consistent, high-quality standards

Look for the green and gold kangaroo logo as a trusted mark of authenticity.

Built for Australian conditions

Murray's fencing range is designed to perform in tough rural environments, delivering durability and consistency across applications.

The range includes:

- Stiff Stay and Hinged Joint prefabricated fencing
- Barbed and Barbless Safe-Twist wire
- Tree Guard mesh
- Sheep Yard mesh

Reliable supply, local support

All products are made at Murray's 8,000sqm Albury facility, enabling:

- Consistent product quality
- Improved availability across Australia
- Faster response to changing demand

This local manufacturing footprint also supports regional jobs and helps sustain Australian industry capability.

Supporting rural Australia

Murray works closely with farmers, contractors and stockists to continuously improve its products and ensure they meet real-world needs.

By choosing Murray, you're supporting a brand committed to:

- Australian manufacturing
- Rural communities
- Long-term investment in the industry



WEBSITE

To find out more about the products and stay in touch, scan for our **Whites Rural** website and Facebook.



FACEBOOK



MURRAY

MURRAY®
**STIFF
STAY®**



Murray Stiff Stay prefabricated fencing is **exclusively made** on the world-renowned Stiff Stay machines producing a tight, smooth knot in multiple configurations to suit farming requirements across the country.

Murray Barbed Wire & Barbless Safe-Twist Wire are produced using the **latest and highest tolerance** barbed wire machines available today for a tight twist that adds strength and prevents barbs slipping. Supplied on hardwood timber spools.

MURRAY®
**BARBED/BARBLESS
WIRE**



"The Horse Mesh Stiff Stay is a very heavy-duty, high-tensile product that keeps our horses safe, their feet secure, and stops our small dogs getting through, and it's so durable that I recommend it to many people and will for a long time."



Scan
for more
information

Murray Hinged Joint and other Murray products are also manufactured at our Albury site.

STIFF STAY®

Murray Stiff Stay prefabricated fencing is made exclusively on the Stiff Stay machine at our Albury manufacturing facility in regional Australia.



STIFF STAY® FARM FENCING

- Popular 30cm and 15cm picket spacings
- Heavily galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength (Heavy galv only)
- 2.50mm high-tensile line wires and 2.50mm vertical stay wires

Also available in Standard galvanised to AS4534 with 2.50mm high-tensile line wires and 2.50mm vertical stay wires.



Smoother, tight **cross-over knot** that locks the wires in place for strength and safety




Continuous vertical pickets that are locked into place to resist buckling and sagging



Pre-stripped rolls for faster fencing – no need to strip picket wires; the first two pickets and the last two pickets are removed



Tension crimps provide a quick visual for judging tension

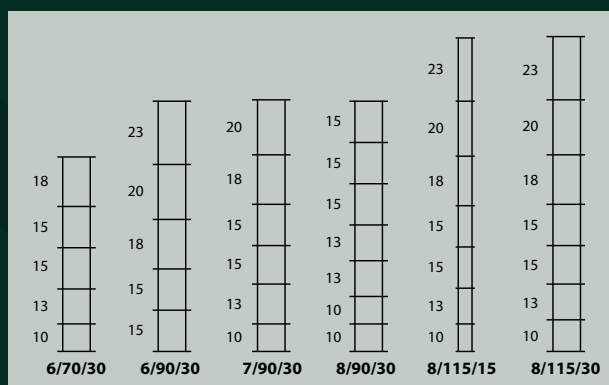

Scan
for more
information

Heavily Galv. Code (Weight)	Standard Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY® FARM FENCING					
A0280 (64.5kg)		6/70/45	200m	High	9
10231 (72kg)	A0201 (68kg)	6/70/30	200m	High	9
A0261 (180kg)		6/70/30	500m	High	4
10232 (78kg)	A0202 (73kg)	6/90/30	200m	High	27
A0262 (195kg)		6/90/30	500m	High	4
10233 (86kg)	10203 (81kg)	7/90/30	200m	High	9
10263 (215kg)	10223 (202kg)	7/90/30	500m	High	4
10221 (31kg)		8/90/15	50m	High	9
10238 (63kg)	A0208 (60kg)	8/90/15	100m	High	9
A0266 (156kg)		8/90/15	250m	High	4
10234 (94kg)	A0204 (89kg)	8/90/30	200m	High	9
A0265 (235kg)		8/90/30	500m	High	4
10239 (69kg)		8/115/15	100m	High	9
A0269 (172kg)		8/115/15	250m	High	4
10262 (85.5kg)		11/142/15	100m	High	9

- # STIFF STAY® 2mm FARM FENCING

ACREAGE FENCING


- 15cm picket spacings
- Graduated line spacings

Yard fence for dogs, goats, llamas and crops. Keeps your animals in and unwanted animals out of your property


- 10cm picket spacings
- Equal line spacings

Keeps smaller animals in or out.
Extra strength, more wire, for larger
animals and better protection


- 5cm picket spacings
- Equal line spacings

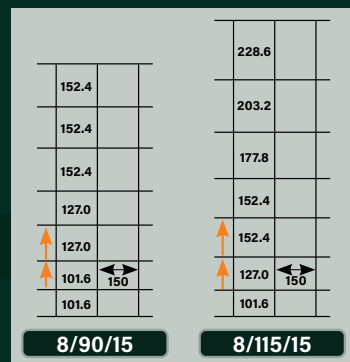

**Scan
for more
information**

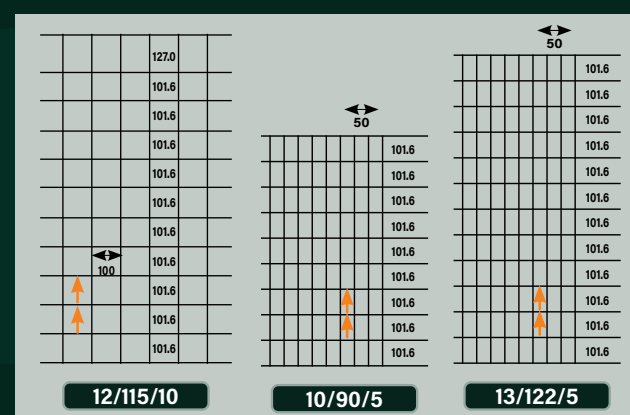

- 2.5mm top and bottom wires
- 2mm line and picket wire is an excellent, economical alternative to heavier fencing
- 15cm picket spacings
- Graduated line spacings

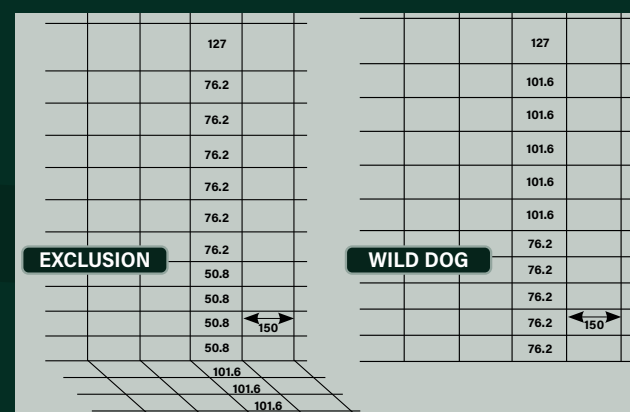

Better over uneven terrain, resist sagging




Heavily galvanised
last four times longer



Standard Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
2mm STIFF STAY® ACREAGE FENCING				
10225 (43.5kg)	8/115/15	100m	High	9
10226 (39.5kg)	8/90/15	100m	High	9
2mm STIFF STAY® YARDPLUS FENCING				
10227 (57kg)	13/122/5	50m	High	9
10228 (43.5kg)	10/90/5	50m	High	9
2mm STIFF STAY® YARD FENCING				
10229 (68kg)	12/115/10	100m	High	9
2mm/2.50mm STIFF STAY® EXCLUSION FENCING				
10222 (57kg)	13/90/15	100m	High	9
10224 (71kg)	13/90/15 w/footer	100m	High	9
2mm/2.50mm STIFF STAY® WILD DOG FENCING				
10290 (56kg)	13/115/15	100m	High	9

STIFF STAY® HORSE FENCING

- Super-tight 5cm picket spacings
- Heavily galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength
- 2.50mm high-tensile line wires and 2.50mm vertical stay wires

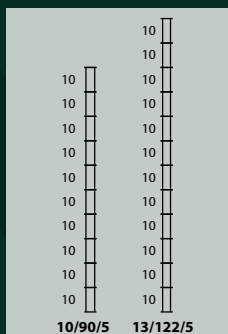

Scan for more information


STIFF STAY® EXCLUSION FENCING

- Narrow 15cm picket spacings
- Heavily galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength
- 2.50mm high-tensile line wires and 2.50mm vertical stay wires

Optional pre-attached hinge apron to restrict penetration or digging under the fence



Scan for more information

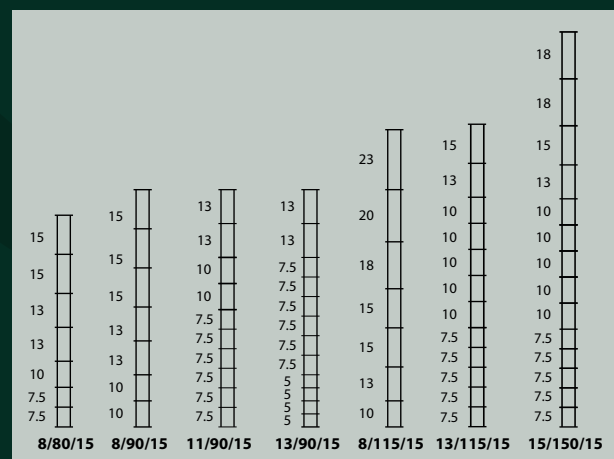

Heavily Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY® HORSE FENCING				
10264 (68kg)	10/90/5	50m	High	9
10256 (93kg)	13/122/5	50m	High	9

Heavily Galv. Code (Weight)	Product	Hinged Apron	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY® EXCLUSION FENCING					
10235 (62kg)	8/80/15		100m	High	9
10238 (63kg)	8/90/15		100m	High	9
A0267 (84kg)	8/90/15	30cm	100m	High	9
A0266 (156kg)	8/90/15		250m	High	4
A0414 (312kg)	8/90/15		500m	High	4
A0268 (209kg)	8/90/15	30cm	250m	High	4
A0415 (418kg)	8/90/15	30cm	500m	High	2
10289 (76kg)	11/90/15		100m	High	9
10285 (97kg)	11/90/15	30cm	100m	High	9
A0423 (223kg)	11/90/15	30cm	250m	High	4
10251 (86kg)	13/90/15		100m	High	9
10255 (106kg)	13/90/15	30cm	100m	High	9
A0439 (212kg)	13/90/15	30cm	250m	High	4
10239 (69kg)	8/115/15		100m	High	9
A0270 (90kg)	8/115/15	30cm	100m	High	9
A0269 (172kg)	8/115/15		250m	High	4
A0271 (225kg)	8/115/15	30cm	250m	High	4
A0421 (243kg)	11/90/15	30cm	250m	High	4
A0422 (486kg)	11/90/15	30cm	500m	High	2
A0390 (258kg)	11/115/15	30cm	250m	High	4
A0442 (265kg)	13/90/15	30cm	250m	High	4
10259 (92kg)	13/115/15		100m	High	9
A0273 (140kg)	13/115/15	30cm	100m	High	9
A0272 (228kg)	13/115/15		250m	High	4
A0274 (281kg)	13/115/15	30cm	250m	High	4
A0391 (118kg)	13/137/15	30cm	100m	High	9
10260 (118kg)	15/150/15		100m	High	9
A0276 (130kg)	15/150/15	30cm	100m	High	9
A0275 (273kg)	15/150/15		250m	High	4
A0277 (325kg)	15/150/15	30cm	250m	High	4
A0278 (651kg)	15/150/15	30cm	500m	High	1
A0395 (343kg)	16/160/15	30cm	250m	High	4
A0279 (134kg)	19/183/15		100m	High	9



Flexible knot absorbs impact and retains shape



HINGED JOINT


Murray Hinged Joint prefabricated fencing is made at our Albury manufacturing facility in regional Australia.



HINGED JOINT FARM FENCING

- 30cm picket spacings ideal for stock, boundary and internal fencing
- 15cm picket spacing for more intensive farming
- Galvanised to AS4534
- 2.50mm high-tensile line wires and 2.50mm vertical stay wires

Also available in Heavily galvanised to AS4534

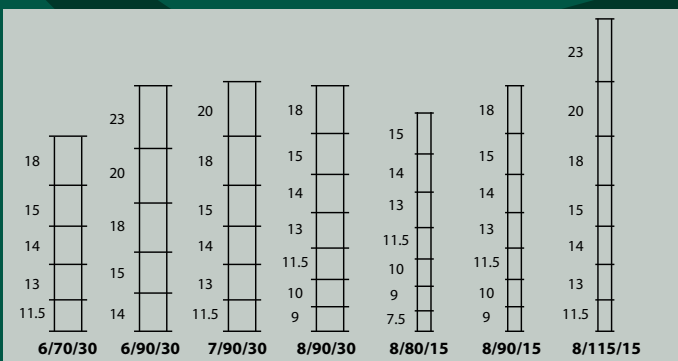

Code	Product	Tensile Strength	Roll Length	Roll Weight	Pallet Qty	Galv. Coating	Line Wire
STANDARD GALVANISED HINGED JOINT							
10291	6/70/30	High	200m	70kg	9	Standard	2.5mm
10292	6/90/30	High	200m	74kg	9	Standard	2.5mm
10293	7/90/30	High	200m	83kg	9	Standard	2.5mm
10294	8/90/30	High	200m	92kg	9	Standard	2.5mm
10295	8/80/15	High	100m	60kg	9	Standard	2.5mm
10298	8/90/15	High	100m	61kg	9	Standard	2.5mm
10299	8/115/15	High	100m	69kg	9	Standard	2.5mm
HEAVY GALVANISED HINGED JOINT							
A0311	6/70/30	High	200m	76kg	9	Heavy	2.5mm
A0312	6/90/30	High	200m	81kg	9	Heavy	2.5mm
A0313	7/90/30	High	200m	90kg	9	Heavy	2.5mm
A0314	8/90/30	High	200m	99kg	9	Heavy	2.5mm
A0315	8/80/15	High	100m	63kg	9	Heavy	2.5mm
A0318	8/90/15	High	100m	67kg	9	Heavy	2.5mm
A0319	8/115/15	High	100m	74kg	9	Heavy	2.5mm



Scan for more information

BARBED WIRE

Murray Barbed Wire is made at our Albury manufacturing facility in regional Australia.



HIGH TENSILE BARBED WIRE

- Made from high-tensile wire in a continuous length for added strength - no joins
- Reverse-twist pattern absorbs heavy loads by 'unwinding' and 'rewinding' under stock pressure
- Barb spacing is consistent and close with limited movement
- Available in Heavily galvanised 1.57mm, 1.80mm and 2.00mm High-tensile wire
- Meets AS2423 Australian Standard



Scan for more information

IOWA BARBED WIRE

- Made from 2.50mm soft/low-tensile wire in a continuous length - no joins
- Continuous-twist pattern locks the barbs in place limiting movement with stock pressure
- Barb spacing is consistent and close with limited movement
- More fire resistant than high tensile - ideal for fire-prone areas
- Softer wire is easier to work with than high tensile



Scan for more information

SAFE-TWIST BARBLESS WIRE

- Made from 2 x 1.8mm high tensile, heavy galvanised wire in a continuous length - no joins
- Meets the critical farming needs of cattle and livestock containment
- Provides a safer environment for wildlife and endangered animals
- Installation is no different to traditional high-tensile barbed wire and tension




Scan for more information



Reverse-Twist Style
for optimum strength and tensioning



Continuous-Twist Style



Continuous Length - No Joins




Coiled on hardwood spools



Code	Wire	Tensile Strength	Coil Length	Coil Weight	Pallet Qty	Galv. Coating	Rec. Tension Breaking Strain
HIGH TENSILE BARBED WIRE							
10100	2.00mm	High	500m	37kg	27	Heavy	1.6kn, 5.0kn
10101	1.80mm	High	500m	28kg	32	Heavy	1.3kn, 4.0kn
10102	1.57mm	High	500m	24kg	48	Heavy	1.3kn, 3.0kn
IOWA BARBED WIRE							
10150	2.50mm	Soft	400m	45kg	27	Standard	1.3kn, 3.0kn
10151	2.50mm	Soft	400m	45kg	27	Heavy	1.3kn, 3.0kn



BARBLESS SAFE-TWIST top and bottom wire

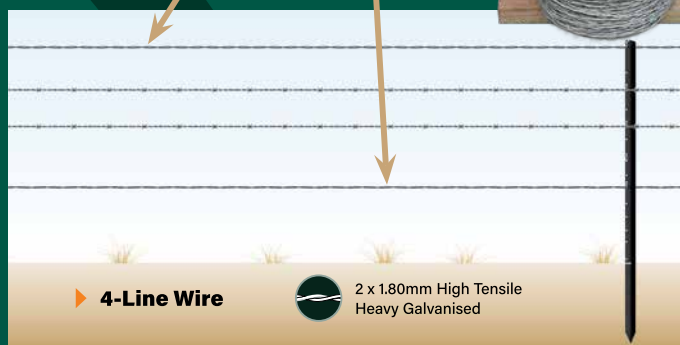

4-Line Wire



2 x 1.80mm High Tensile Heavy Galvanised

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Pallet Qty	Galv. Coating	Rec. Tension Breaking Strain
HIGH TENSILE BARBLESS SAFE-TWIST WIRE							
10103	1.80mm	High	500m	21kg	32	Heavy	1.6kn, 5.0kn



Coiled for smooth,
tangle-free **pay-off**



FENCE WIRE

Murray Fence Wire is coiled at our Albury manufacturing facility in regional Australia. It meets Australian Standards and is available in four grades:

High-Tensile Wire

- Suited to longer strains/fence runs and wider post spacings where strength is imperative
- Heavily galvanised, lasts four times longer than standard galvanised wire

Medium-Tensile Wire

- Easier to handle than high tensile, ideal with prefab fencing
- Heavily galvanised, lasts four times longer than standard galvanised

Soft-Tensile Wire

- Easiest to handle, cost effective
- More fire resistant than high/medium-tensile wire
 - ideal for fire-prone areas

Tie Wire

- Easiest to handle and tie, cost effective



Scan
for more
information

Trellis Wire

- Heavily galvanised to last up to 4 times longer
- Made with high-tensile wire to the highest tolerance
- Smooth tangle-free delivery



Scan
for more
information

WELDED MESH



- SHEEP YARD MESH
- TREE GUARD



Scan
for more
information

Sheep Yard Mesh 6m Length



Scan
for more
information

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Sling Qty	Galv. Coating	Rec. Tension Breaking Strain
HEAVILY GALVANISED FENCE WIRE							
10014	2.50mm	Medium	1500m	58kg	10	Heavy	1.3kn, 3.7kn
10015	2.50mm	High	1500m	58kg	10	Heavy	1.8kn, 5.4kn
10017	3.15mm	Soft	750m	46kg	10	Heavy	1.2kn, 3.0kn
10018	4.00mm	Soft	500m	50kg	10	Heavy	1.8kn, 4.8kn
STANDARD GALVANISED FENCE WIRE							
10161	4.00mm	Soft	500m	49kg	10	Standard	1.8kn, 4.8kn
10163	3.15mm	Soft	750m	46kg	10	Standard	1.2kn, 3.0kn
10170	2.50mm	Medium	1500m	58kg	10	Standard	1.3kn, 3.7kn
10171	2.50mm	High	1500m	58kg	10	Standard	1.8kn, 5.4kn
STANDARD GALVANISED TIE WIRE							
10164	2.50mm	Soft	1300m	50kg	10	Standard	1.3kn, 3.7kn
10165	2.00mm	Soft	2000m	50kg	10	Standard	-
10166	1.57mm	Soft	3200m	50kg	10	Standard	-

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Sling Qty	Galv. Coating	Rec. Tension Breaking Strain
TRELLIS WIRE							
10022	2.00mm	High	2000m	44kg	10	Heavy	1.0kn, 2.7kn
10023	2.65mm	High	1000m	44kg	10	Heavy	2.0kn, 6.0kn
10024	2.85mm	High	1000m	50kg	10	Heavy	2.2kn, 8.3kn
10026	3.15mm	High	1000m	61kg	10	Heavy	3.1kn, 9.4kn

Code	Aperture (mm)	Width (mm)	Length (m)	Weight (kg)	Nom. Wire Dia. (mm)
SHEEP YARD MESH					
ASYM1	100 x 250	900mm	6m	12.7kg	5mm
ASYM2	100 x 250	1100mm	6m	15.3kg	5mm
ASYM3	100 x 200	900mm	6m	13.5kg	5mm
ASYM4	100 x 200	1100mm	6m	16.3kg	5mm
ASYM5	100 x 150	900mm	6m	14.9kg	5mm
ASYM6	100 x 150	1100mm	6m	18kg	5mm

Code	Aperture (mm)	Diameter (mm)	Height (mm)	Length (mm)	Weight (kg)	Wire Dia. (mm)
TREE GUARD						
ATREE	160 x 100	750	1760	2400	11.2kg	5





MURRAY RANGE

Complete your fence with premium fencing products from the Murray range.



STIFF STAY® FENCING

FARM, HORSE
& EXCLUSION

HEAVY &
STANDARD
GALVANISED

2mm STANDARD
GALVANISED

HINGED JOINT

GALVANISED
TO AS4534




BARBED WIRE

HIGH TENSILE
& IOWA

SAFE-TWIST
BARBLESS

FENCE WIRE

HEAVILY &
STANDARD
GALVANISED

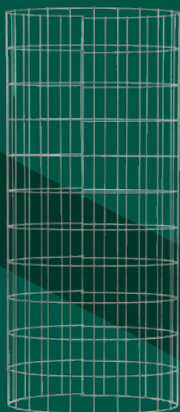


TREE GUARD

GALVANISED
WELDED MESH

SHEEP YARD MESH

PREMIUM
GRADE WIRE

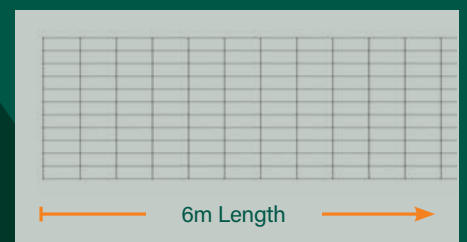

Scan
for more
information

Installation Videos



Australian Made



Hinged Joint



Tree Guard



Prefabricated Fencing



Stiff Stay®



Safe-Twist



MURRAY



MURRAY Australian Fencing



A family
owned
Australian
business

Whites Group Pty Ltd

ABN 25 001 845 478

SYDNEY
2B/201 Power St,
Glendenning,
NSW 2761

ALBURY
109 Boronia Rd,
Albury,
NSW 2640

BRISBANE
4/15 Seeana Pl,
Heathwood,
QLD 4110

MELBOURNE
25 Glasscocks Rd,
Dandenong South,
VIC 3175

PERTH
53 Collopy Rd,
Perth Airport,
WA 6105

ADELAIDE
18 Bradford Way,
Cavan,
SA 5094

Enquiries: **1300 559 732** Fax: 1300 559 762 Email: info@whitesrural.com.au
Specifications referred to in this publication are subject to change,
variation and/or improvement without notice.

For the most up-to-date details on all our rural products, visit our website
at www.whitesrural.com.au

© WHITES RURAL, MURRAY and STIFF STAY are registered trademarks of Whites Group Pty Ltd

 facebook.com/whitesrural

88603 - 07/2026